


姿図

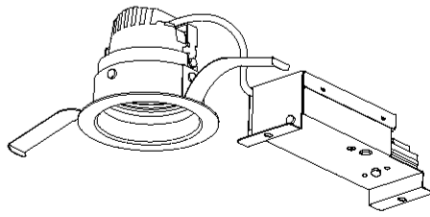

品番	DL-DD13H
光源	LED 3500K 9.5W
定格光束	550.0 lm
1/2照度角	24°
ビーム角	26°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.42 H B 0.42 H
保守率	良 0.63 中 0.60 否 0.53

反射率 (%)	天井			壁			50			30			0		
	80	70	50	50	30	10	50	30	10	50	30	10	50	30	10
室指数	照 明 率 ( × 0.01 )														
0.6	81	76	73	80	76	73	79	75	72	78	75	72	71		
0.8	87	82	78	86	81	78	85	81	78	83	80	77	75		
1	92	88	84	91	87	84	90	86	83	88	85	82	80		
1.25	97	92	89	96	92	88	94	90	87	92	89	87	84		
1.5	100	96	93	99	95	92	96	93	91	94	92	90	87		
2	105	102	99	104	101	98	101	98	96	98	96	95	92		
2.5	109	106	103	107	104	102	104	102	100	101	99	98	95		
3	111	109	107	109	107	105	106	104	103	103	102	101	97		
4	114	112	110	112	110	109	108	107	106	104	104	103	99		
5	115	114	112	113	112	111	109	108	107	105	105	104	100		

